



- (51) International Patent Classification:
H04L 5/00 (2006.01) *H04W 72/04* (2009.01)
- (21) International Application Number:
PCT/IB2020/059660
- (22) International Filing Date:
14 October 2020 (14.10.2020)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
62/915,463 15 October 2019 (15.10.2019) US
- (71) Applicant: **TELEFONAKTIEBOLAGET LM ERICSSON (PUBL)** [SE/SE]; SE-164 83 Stockholm (SE).
- (72) Inventors: **GAO, Shiwei**; 78 Dragon Park Drive, Nepean, Ontario K2J 0H5 (CA). **FRENNE, Mattias**; Arkeologvä-
- gen 20, SE-754 43 Uppsala (SE). **MURUGANATHAN, Si-**
va; 275 Denali Way, Stittsville, Ontario K2S 0R3 (CA).
- (74) Agent: **BEVINS, R. Chad**; 106 Pinedale Springs Way, Cary, North Carolina 27511 (US).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(54) Title: SYSTEMS AND METHODS FOR SIGNALING STARTING SYMBOLS IN MULTIPLE PDSCH TRANSMISSION OCCASIONS

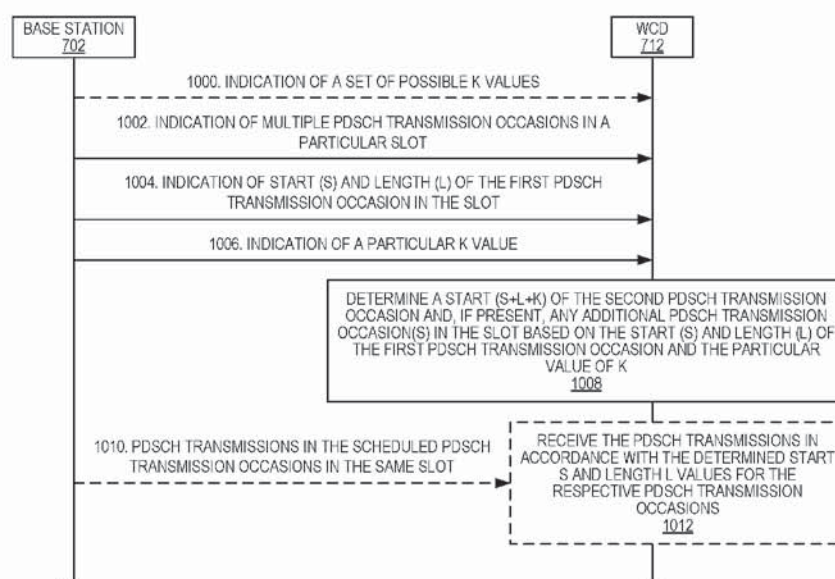


FIG. 10

(57) Abstract: Systems and methods related to indicating starting symbols of multiple transmission occasions in a cellular communications system are disclosed. In one embodiment, a method performed by a wireless communication device comprises receiving an indication of transmission occasions for respective downlink transmissions to the wireless communication device, at least two of the downlink transmissions associated to different transmission configuration indication states. The method further comprises receiving an indication of a starting symbol and a length of a first transmission occasion of the transmission occasions and receiving an indication of a particular offset value that is to be applied for determining a starting symbol of a second transmission occasion of the transmission occasions. The method further comprises determining a starting symbol of the second transmission occasion based on the starting symbol of the first transmission occasion, the length of the first transmission occasion, and the particular offset value.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *in black and white; the international application as filed contained color or greyscale and is available for download from PATENTSCOPE*