



(51) International Patent Classification:

H04L 29/08 (2006.01) H04L 29/12 (2006.01)
H04L 12/24 (2006.01) H04L 29/06 (2006.01)

(21) International Application Number:

PCT/EP2020/064397

(22) International Filing Date:

25 May 2020 (25.05.2020)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

20382307.5 16 April 2020 (16.04.2020) EP

(71) Applicant: **TELEFONAKTIEBOLAGET LM
ERICSSON (PUBL)** [SE/SE]; 16483 Stockholm (SE).

(72) Inventor: **MUÑOZ DE LA TORRE ALONSO, Miguel
Angel**; Padre Claret 6, 8C ESC D, 28002 Madrid (ES).

(74) Agent: **BERTSCH, Florian**; Kraus & Weisert Paten-
tanwälte PartGmbH, Thomas-Wimmer-Ring 15, 80539
München (DE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,

HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: USER PLANE BASED EXPOSURE

FIG.3

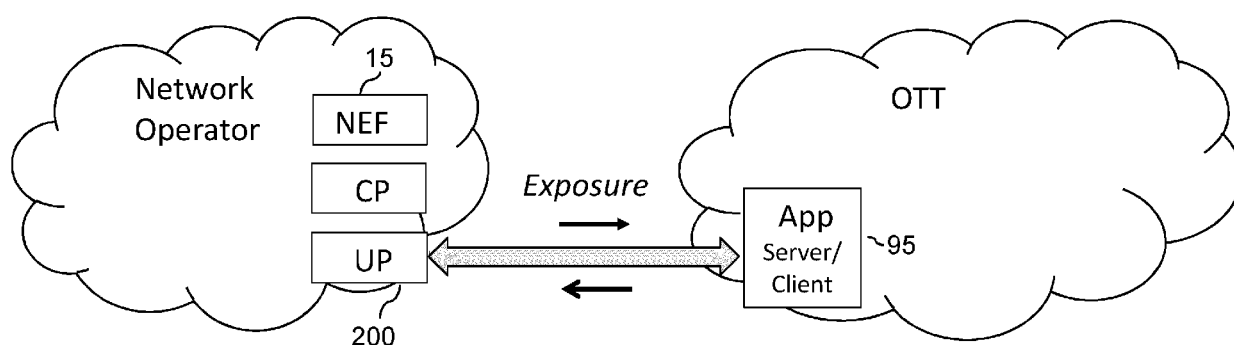

(57) Abstract: The invention relates to a method for operating a user equipment (100) requesting a data packet flow from an application entity transmitted through a cellular network to the user equipment, comprising: - transmitting (S20) a first request to a translating entity (700) configured to translate a name of the application entity providing the data packet flow to an address of the application entity through which the application entity can be reached, the first request requesting an identification of a user plane entity (200) configured to handle the data packet flow in the cellular network, - receiving (S24) a response to the first request, the response comprising a user plane identifier identifying the user plane entity (200), - transmitting (S26) a policy request to the identified user plane entity (200), the policy request comprising a flow identifier allowing an identification of the data packet flow in the cellular network, and policy information indicating a policy to be applied to the data packet flow in the cellular network for a transmission of the data packet flow through the cellular network.

